


- NOTES:
- 1. AFFIX CM2987-5 ID TAG NEAR PLUG.
 - 2. REFER TO 8654500 FOR LIGHTING AND GROUND BLOCK/STUD LOCATIONS.
 - 3. TRI-STAR ELECTRONICS INC., VENICE, CALIF.
 - 4. THE POLARIZING POSTS ARE INCLUDED WITH THE CONNECTOR AS LOOSE EQUIPMENT. THEY ARE TO BE INSTALLED IN THE CONNECTOR DURING ASSEMBLY. THE POLARIZATION POSITION IS TO BE THE SAME AS THE MATING CONNECTOR ON THE ASSOCIATED VENDOR BOX.
 - 5. ALL WIRE PER MIL-W-81044/12, 22 AWG, EXCEPT AS NOTED.
 - 6. SINGLE CONDUCTOR SHIELDED WIRE PER M27500-**ML1T08. TWO CONDUCTOR SHIELDED WIRE PER M27500-**ML2T08. THREE CONDUCTOR SHIELDED WIRE PER M27500-**ML3T08. TWISTED PAIR PER M27500-**ML2U00.
 - 7. LINES SHOWN AS BOLD SHALL MEET THE HIRF GUIDELINES AS SPELLED OUT ON THE AVIONICS CABLE KIT, AND MANUFACTURED IN ACCORDANCE WITH CESSNA SPECIFICATION CSAM012.
 - 8. MISC HARDWARE:
 - M81824/1-1 SPLICE
 - M81824/1-2 SPLICE
 - S2974-2 SHIELD TERMINATION
 - S2974-3 SHIELD TERMINATION
 - 9. POSITRONIC IND INC., SPRINGFIELD, MO. CI 28198
 - 10. FOR 20 AWG WIRE, USE TRISTAR PIN P/N 219-2220-079 WITH EXTRACTION TOOL: M81969/14-01.
 - 11. SUNBANK ELECTRONICS INC., PASO ROBLES, CA.

REVISIONS		
SHEET	REV	DESCRIPTION
		DATE

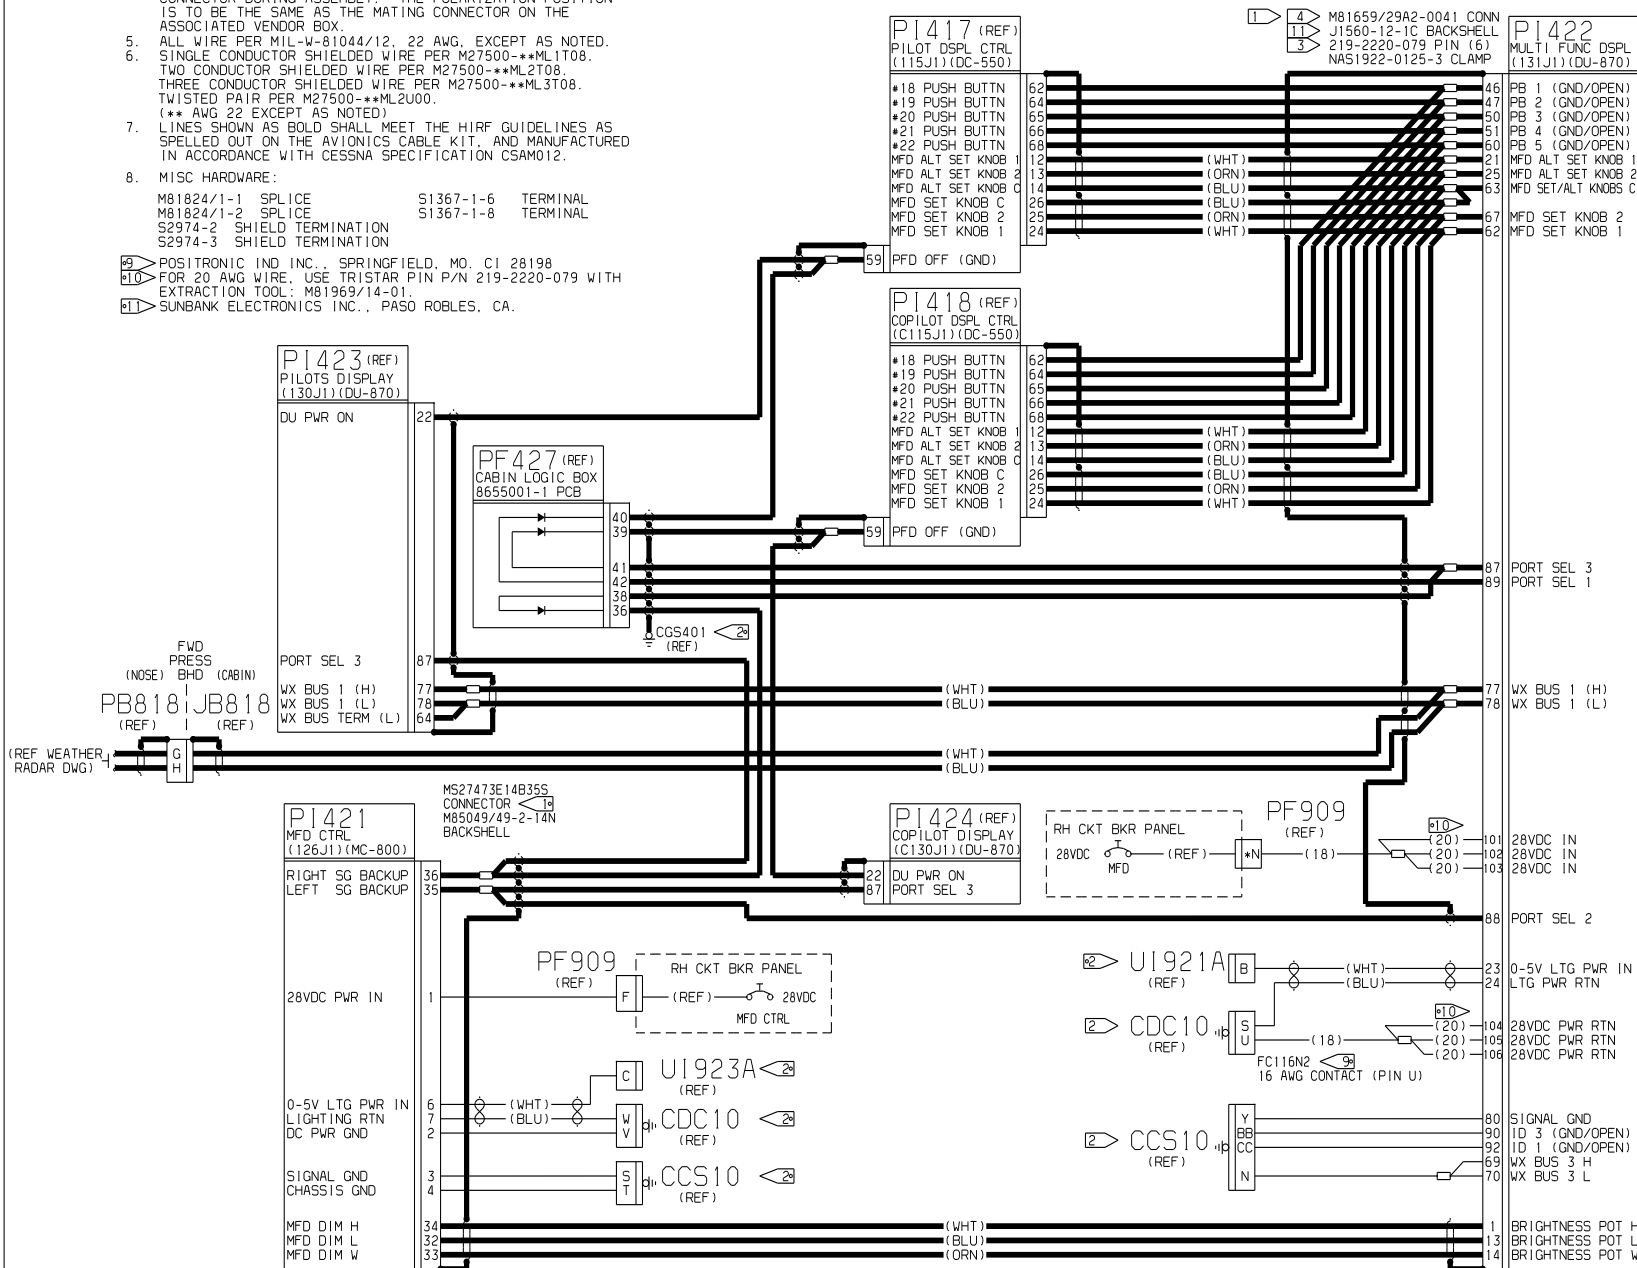

DATE	01/02/97	CESSNA AIRCRAFT COMPANY
DRAWN	STEVEN AKER	AIRCRAFT DIVISION
GROUP		P.O. BOX 7704
CHECK		WICHITA, KANSAS 67277
SECT		
PROJ		
M.E.		
OTHER		
FABRICATE PER	CES2606	
PROCESS PER	XXXXXXXXXXXXXX	
WIRE TERMINATION PER	CES2716	
SIZE	FSCH NO.	DWG NO.
SCALE	SCL	
C/A - PRIMUS 1000 MULTI FUNCTIONAL DISPLAY WITH ENHANCED GWS		EC34152
F 71379		SHEET 1 OF 1