


NOTES:

- ALL WIRES TO BE PER MIL-W-81044/12, 22AWG, EXCEPT AS NOTED.
- TWO CONDUCTOR SHIELDED WIRE PER M27500-**ML2T08
TWO CONDUCTOR TWISTED PAIR PER M27500-**ML2U00
** INDICATES 22 AWG, EXCEPT AS NOTED.
- AFFIX CM2987-5 ID TAG NEAR CONNECTOR.
- REFER TO 8654500 FOR LIGHTING/GROUND BLOCK LOCATION.
- MISC. HARDWARE:
S2974N3
S1367-1-6
- LINE SHOWN AS BOLD SHALL MEET THE HIRF GUIDELINES AS SPELLED OUT ON THE AVIONICS CABLE KIT, AND MANUFACTURED IN ACCORDANCE WITH CESSNA SPECIFICATION CSAM012
- ITT CANON, SANTA ANA, CA.

REVISIONS				
SHEET	REV	DESCRIPTION	DATE	APPROVED
1	A	BY REVISION: 1) REF PF715: CHANGED PIN N TO PIN T CHANGED PIN L TO PIN U EFF: EC 39415	12/03/97 CW	
1	B	BY REVISION: 1) ADDED 7P1901-4P1901 EFF: EC 39415	10/28/98 RF	

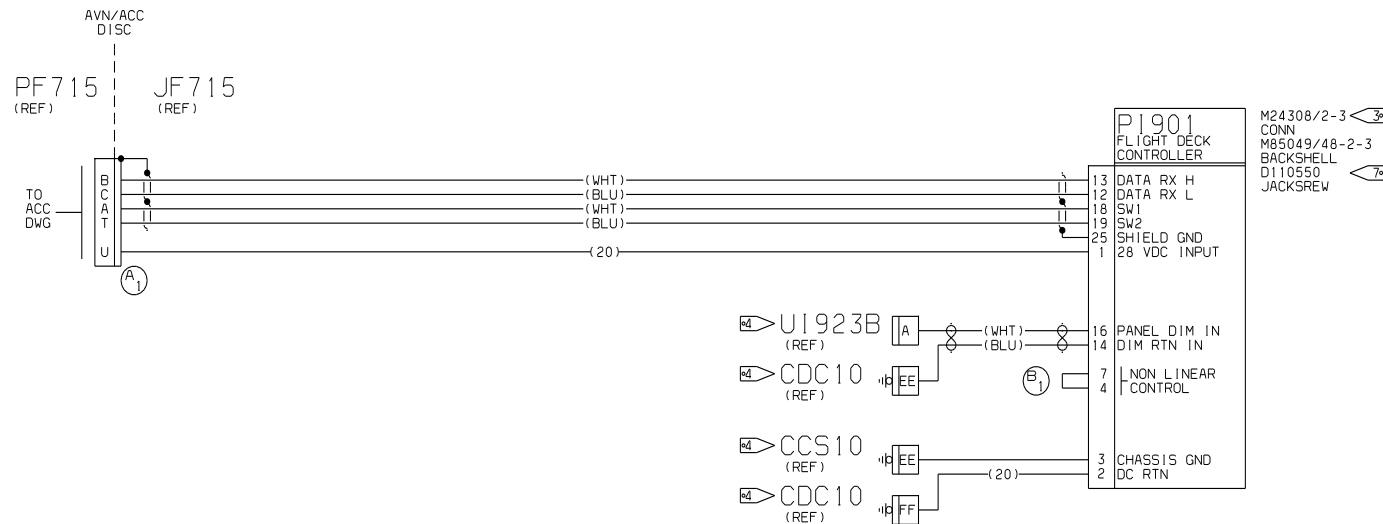

DATE 09/15/97		CESSNA AIRCRAFT COMPANY	
DRAWN CARLON VORAN		AIRCRAFT DIVISION	
CHECK		P.O. BOX 7704	
SECT		WICHITA, KANSAS 67277	
PROJ		C/A-AIRSHOW NETWORK	
M.E.		FLIGHT DATA CONTROLLER	
OTHER		(PEDESTAL DZUS MOUNT)	
FABRICATE PER CES2608		SIZE F50M NO.	DWG NO.
PROCESS PER MIL-W-81044/12		F 71379	***
WIRE TERMINATION PER CES2716		SCALE:	S. E. R.
		SHEET 1 OF 1	