


NOTES:

1. ALL WIRES TO BE PER MIL-W-81044/12, 22AWG, EXCEPT AS NOTED.
2. TWO CONDUCTOR SHEILDDED WIRE PER M27500-\*\*ML2T08  
TWO CONDUCTOR TWISTED PAIR PER M27500-\*\*ML2U00  
\*\* INDICATES 22 AWG. EXCEPT AS NOTED.
- 3 AFFIX CM2987-5 ID TAG NEAR CONNECTOR.
- 4 REFER TO 8654500 FOR LIGHTING/GROUND BLOCK LOCATION.
5. MISC. HARDWARE:  
S2974N3  
S1367-1-6
6. LINES SHOWN AS BOLD SHALL MEET THE HIRF GUIDELINES AS SPELLED OUT ON THE AVIONICS CABLE KIT, AND MANUFACTURED IN ACCORDANCE WITH CESSNA SPECIFICATION CSAM012
- 7 ITT CANON, SANTA ANA, CA.

REVISIONS				
SHEET	REV	DESCRIPTION	DATE	APPROVED
1	A	BY REVISION: 1) REF PF715: CHANGED PIN N TO PIN T CHANGED PIN L TO PIN U  EFF: EC 39415	12/03/97 CW	
1	B	BY REVISION: 1) ADDED 7P1901-4P1901  EFF: EC 39415	10/28/98 RF	

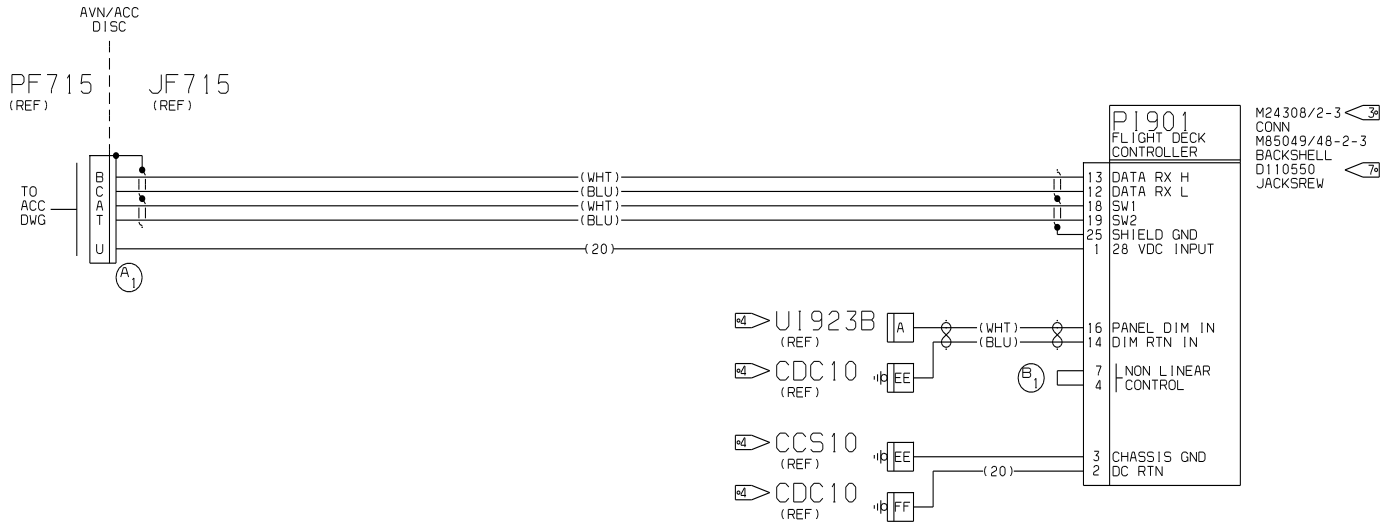

DATE	09/15/97	CESSNA AIRCRAFT COMPANY AIRCRAFT DIVISION P.O. BOX 7704 WICHITA, KANSAS 67277
DRAWN	CARLON VORAN	 C/A-AIRSHOW NETWORK FLIGHT DATA CONTROLLER (PEDESTAL DZUS MOUNT)
GROUP		
CHECK		
SECT		
PROJ		
M. E.		SIZE F50M NO.    DWG NO.
OTHER		<b>F 71379</b>
FABRICATE PER CES2606		SCALE:    S. E. R.    SHEET 1 OF 1
PROCESS PER MIL-W-81044/12		
WIRE TERMINATION PER CES2716		

EC 39415