


REVISIONS		
SHEET	REV	DESCRIPTION
		DATE   APPROVED

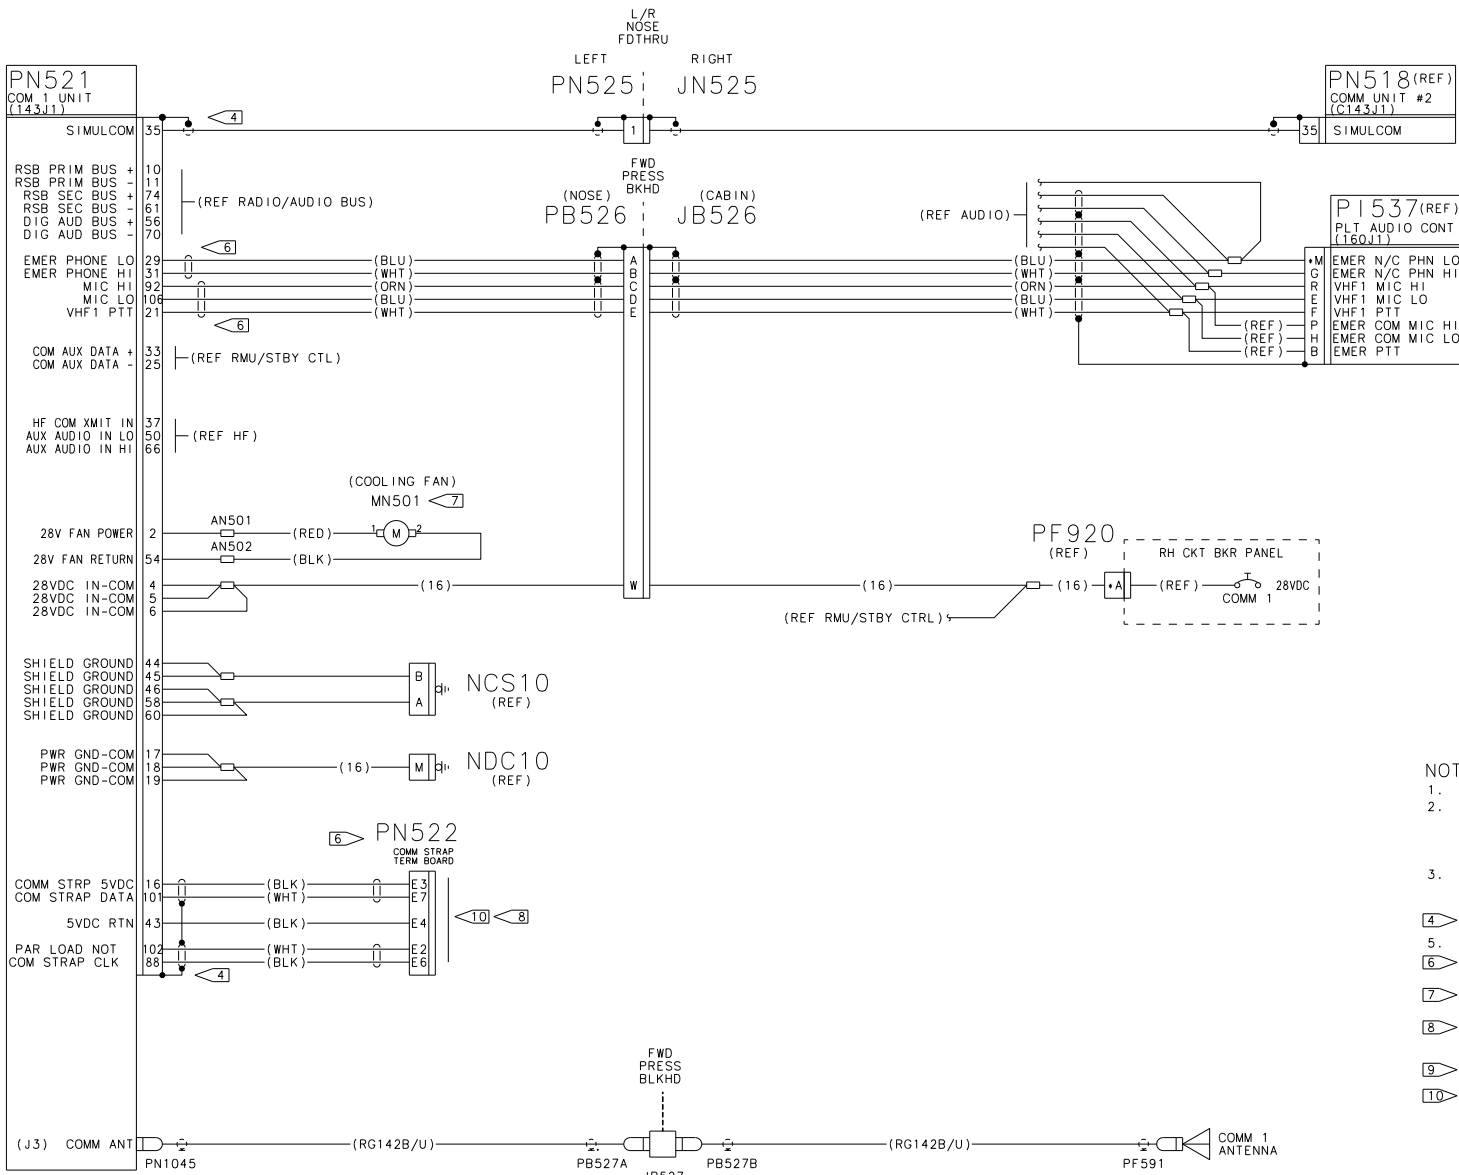

- NOTES:
- THIS DRAWING IS FILED IN CCD.
  - UNSHIELDED WIRE SHALL BE PER M81044/12-XX-9  
SINGLE CONDUCTOR SHIELDED WIRE PER M27500-XXML1T08  
TWO CONDUCTOR SHIELDED WIRE PER M27500-XXML2T08  
THREE CONDUCTOR SHIELDED WIRE PER M27500-XXML3T08  
(XX=22 AWG EXCEPT AS NOTED)
  - FOR GROUND BLOCK/STUD LOCATIONS, REFER TO GROUND BLOCK/STUD INSTL DWG CALLED OUT ON THE AVIONICS INSTL KIT.
  - TERMINATE SHIELD BRAIDS AT GROUND STUD ON RACK.
  - AN ASTERISK PRECEDING A LETTER INDICATES LOWER CASE.
  - PERMISSIBLE FOR WIRE(S) TO DEVIATE FROM HIRF REQUIREMENTS AS DEFINED IN CSAM012.
  - COOLING FAN AND WIRES FURNISHED AS PART AS COMM TRAY. REFERENCE NOSE EQUIPMENT INSTL DWG FOR P/N.
  - STRAP BOARD CONNECTOR, GROMMET AND WIRES, FURNISHED AS PART OF STRAP ASSY KIT. REFERENCE NOSE EQUIPMENT INSTL DWG FOR P/N.
  - PERMISSIBLE TO SUBSTITUTE SHIELD BRAID WITH 22AWG WIRE.
  - REFER TO NOSE EQUIP INSTL FOR INSTALLATION OF STRAP BOARD ENCLOSURE.

DATE	05/16/03	CESSNA AIRCRAFT COMPANY AIRCRAFT DIVISION P.O. BOX 7704 WICHITA, KANSAS 67277
DRAWN	M. MILLS	
CHECK		CABLE ASSY- COMM 1 (HONEYWELL)
SECT		
PROJ		SIZE / PCH NO.    DWG NO. <b>F71379</b> 8601176
DWG		
OTHER		SCALE: NONE    SHEET 1 OF 1
FABRICATE PER CSAM005		
PROCESS PER XXXXXXXXXX		
WIRE TERMINATION PER CS22716		

8601176 1 1 UC 52743