


REVISIONS			
SHEET	REV	DESCRIPTION	DATE APPROVED
1	A	BY REVISION: 1) REMOVED FLAG NOTE 7. EFF: EC 53204	04/27/04 MAM

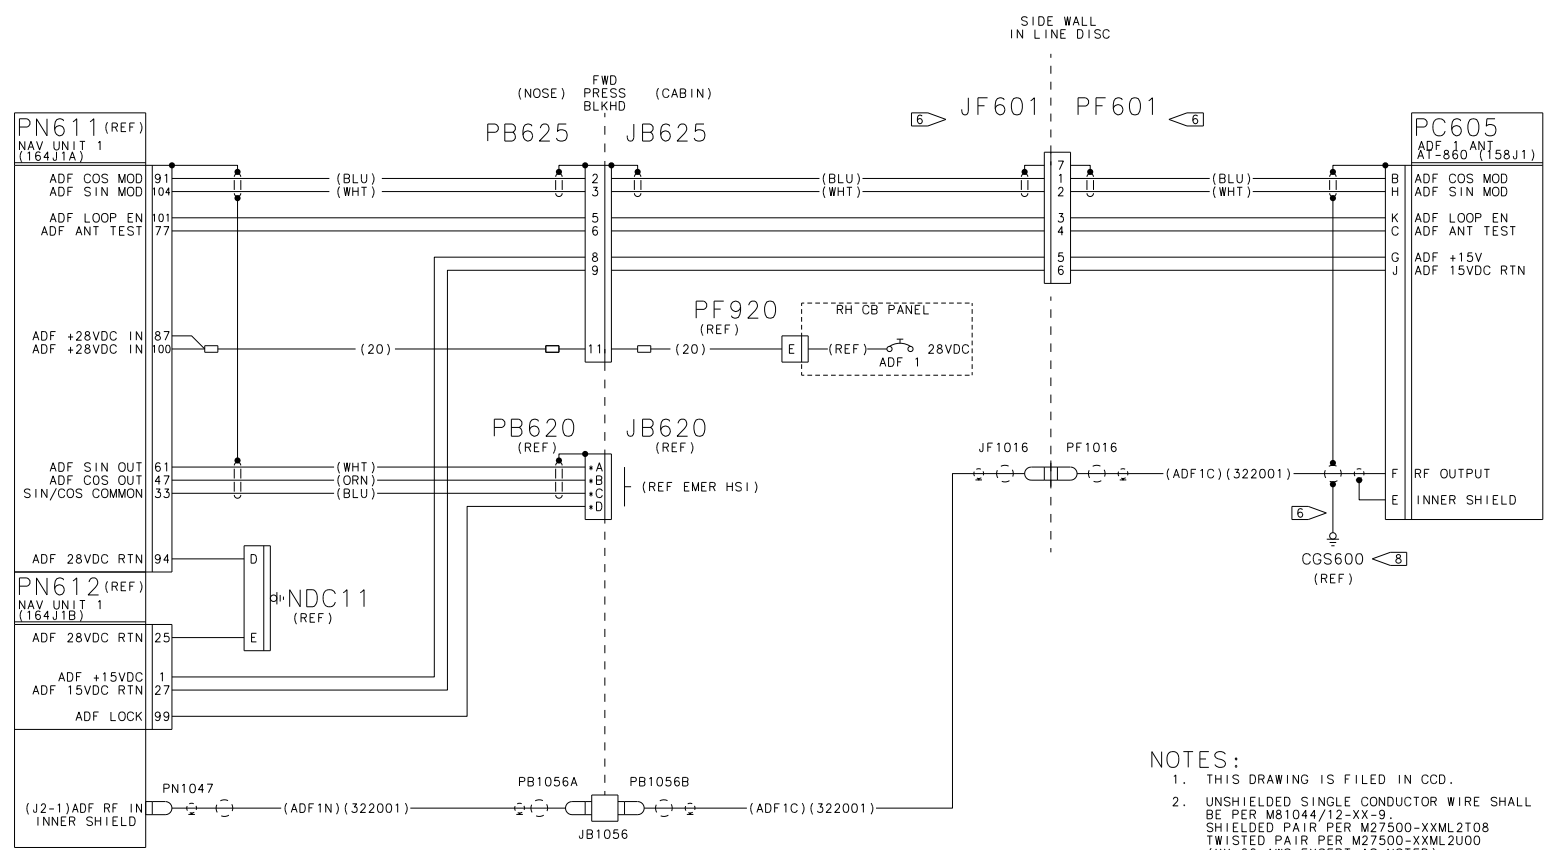

- NOTES:**
- THIS DRAWING IS FILED IN CCD.
  - UNSHIELDED SINGLE CONDUCTOR WIRE SHALL BE PER M81044/12-XX-9. SHIELDED PAIR PER M27500-XXML2T08 TWISTED PAIR PER M27500-XXML2U00 (XX=22 AWG EXCEPT AS NOTED)
  - FOR LIGHTING & GND BLOCK/STUD LOCATIONS, REFER TO THE LIGHTING & GND BLOCK/STUD INSTL DWGS CALLED OUT ON THE AVIONICS INSTL KIT.
  - AN ASTERISK PRECEEDING A LETTER INDICATES LOWER CASE.
  - REFER TO PROGRAMMING DWG FOR QUADRANTAL ERROR STRAPPING REQUIREMENTS.
  - PERMISSIBLE TO DEVIATE FROM HIRF REQUIREMENTS AS DEFINED BY CSAM012, AND 22AWG WIRE MAY BE USED IN PLACE OF SHIELD BRAIDS.
  - POT CONNECTOR PER CS2093.
  - WIRE LENGTH NOT TO EXCEED 10 INCHES.

DATE	05/20/03	CESSNA AIRCRAFT COMPANY AIRCRAFT DIVISION P.O. BOX 7704 WICHITA, KANSAS 67277
DRAWN	M. MILLS	
GROUP		<b>CABLE ASSY- ADF 1</b>
CHECK		
SECT		
PROJ		
M.E.		
OTHER		
FABRICATE PER CSAM005	SIZE (FSCM NO.)	
PROCESS PER XX22248343XX	<b>F71379</b>	8604109
WIRE TERMINATION PER SES2216	SCALE:	PARENT: 8604108 SHEET 1 OF 1

8604109 A EC 052743