


- NOTES:
- 1. AFFIX CM2987-5 ID TAG NEAR PLUG.
 - 2. REFER TO 8654500 FOR LIGHTING AND GROUND BLOCK/STUD LOCATIONS.
 - 3. TRI-STAR ELECTRONICS INC., VENICE, CALIF.
 - 4. THE POLARIZING POSTS ARE INCLUDED WITH THE CONNECTOR AS LOOSE EQUIPMENT. THEY ARE TO BE INSTALLED IN THE CONNECTOR DURING ASSEMBLY. THE POLARIZATION POSITION IS TO BE THE SAME AS THE MATING CONNECTOR ON THE ASSOCIATED VENDOR BOX.
 - 5. ALL WIRE PER MIL-W-81044/12, 22 AWG, EXCEPT AS NOTED.
 - 6. SINGLE CONDUCTOR SHIELDED WIRE PER M27500-**ML1T08. TWO CONDUCTOR SHIELDED WIRE PER M27500-**ML2T08. THREE CONDUCTOR SHIELDED WIRE PER M27500-**ML3T08. TWISTED PAIR PER M27500-**ML2U00. (** AWG 22 EXCEPT AS NOTED).
 - 7. LINES SHOWN AS BOLD SHALL MEET THE HIRF GUIDELINES AS SPELLED OUT ON THE AVIONICS CABLE KIT, AND MANUFACTURED IN ACCORDANCE WITH CESSNA SPECIFICATION CSAM012.
 - 8. MISC HARDWARE:
 - M81824/1-1 SPLICE S1367-1-6 TERMINAL
 - M81824/1-2 SPLICE S1367-1-8 TERMINAL
 - S2974-2 SHIELD TERMINATION
 - S2974-3 SHIELD TERMINATION
 - 9. POSITRONIC IND INC., SPRINGFIELD, MO. CI 28198
 - 10. FOR 20 AWG WIRE, USE TRISTAR PIN P/N 219-2220-079 WITH EXTRACTION TOOL: M81969/14-01.
 - 11. SUNBANK ELECTRONICS INC., PASO ROBLES, CA.

REVISIONS				
SHEET	REV	DESCRIPTION	DATE	APPROVED

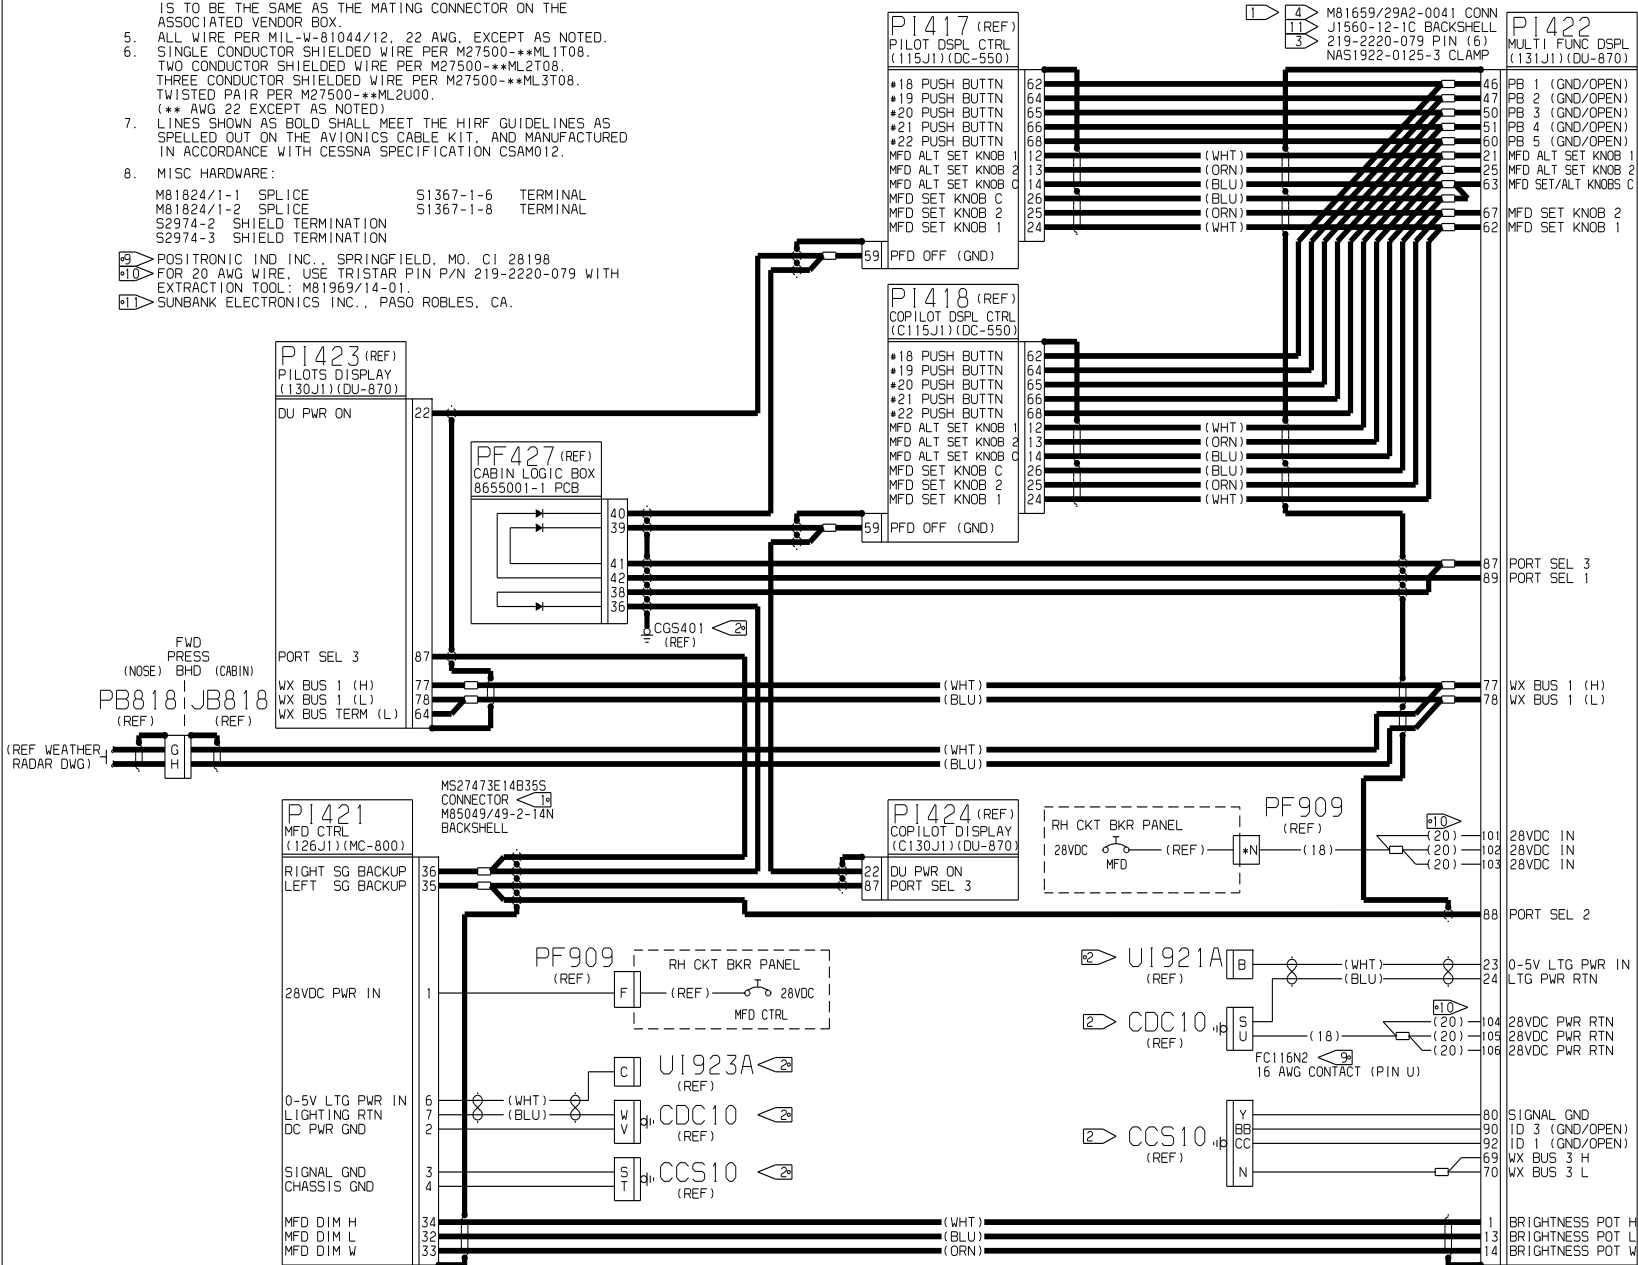

DATE	01/02/97	CESSNA AIRCRAFT COMPANY AIRCRAFT DIVISION P.O. BOX 7704 WICHITA, KANSAS 67277	C/A - PRIMUS 1000 MULTI FUNCTIONAL DISPLAY WITH ENHANCED GPWS
DRAWN	STEVEN AKER		
GROUP		SIZE FSCH NO.	DWG NO.
CHECK			
SECT		F 71379	
PROJ		SCALE: SCL	
M. E.		SHEET 1 OF 1	
OTHER		EC34152 - EC34158	
FABRICATE PER CESSNA PROCESS PER XXXXXXXXXX WIRE TERMINATION PER CES2716		CES FORM 1872	