
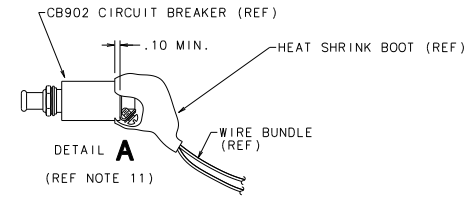


REVISIONS				
SHEET	REV	DESCRIPTION	DATE	APPROVED
	A	BY REVISION: 1) DELETED WIRE - MPOC006-ZPF920. EFF: EC 52743	8/13/03 CGS	
	B	BY REVISION: 1) DELETED WIRES: 37PN311-69PN330 69JN330-SPB331 ADDED WIRE: 37PN311-SPB331 EFF: EC 52743	11/4/03 CGS	

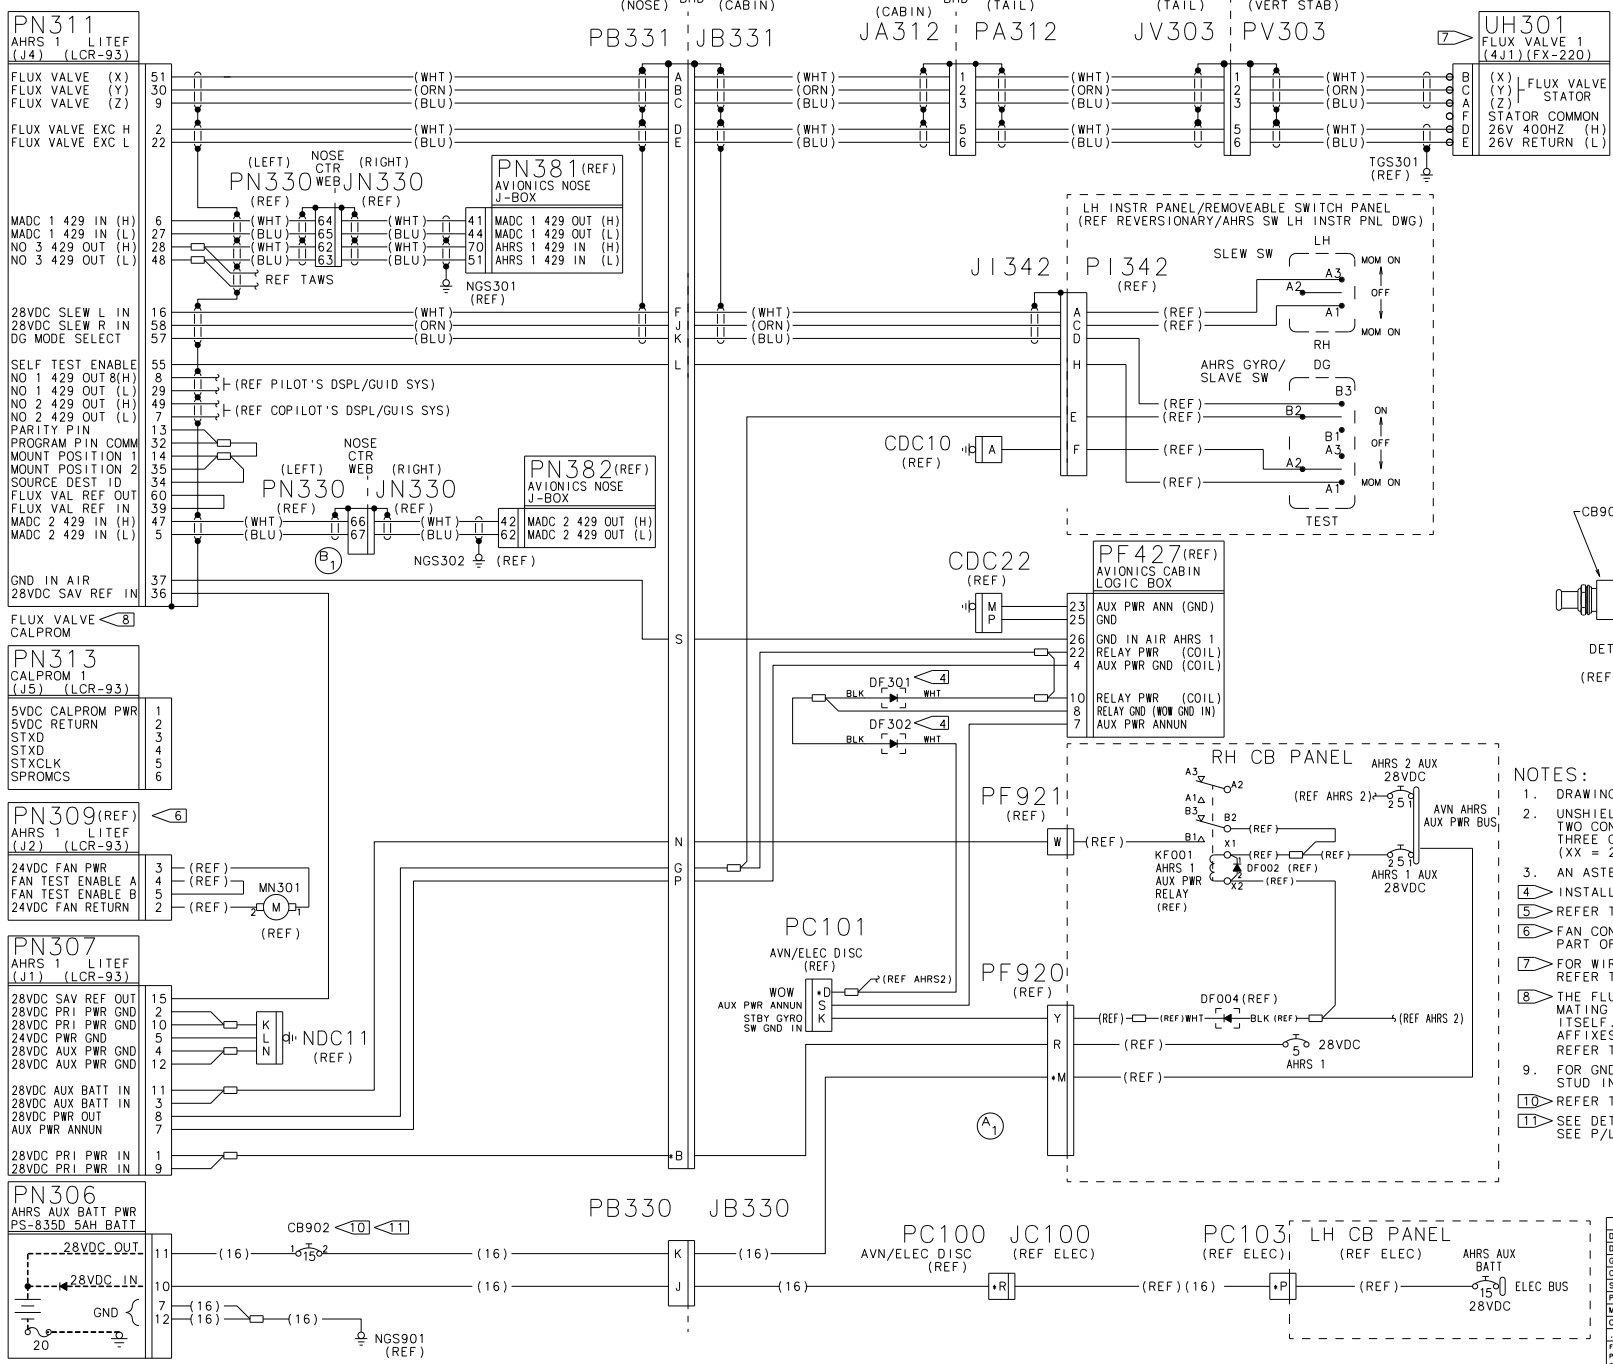

- NOTES:
- DRAWING FILED IN CCD.
 - UNSHIELDED WIRE SHALL BE PER M81044/12-XX-9. TWO CONDUCTOR SHIELDED WIRE PER M27500-XXML2T08. THREE CONDUCTOR SHIELDED WIRE PER M27500-XXML3T08 (XX = 22 AWG, EXCEPT AS NOTED)
 - AN ASTERISK PRECEDING A LETTER INDICATES LOWER CASE.
 - INSTALL DIODE ASSY WITHIN 6" OF PF427 CONNECTOR.
 - REFER TO P/L NOTE 1.
 - FAN CONNECTOR P2 IS VENDOR FURNISHED AND INSTALLED AS PART OF THE MOUNTING TRAY W/FAN ASSY.
 - FOR WIRE TERMINATION INSTRUCTIONS AT FLUX VALVE, REFER TO P/L NOTE 2.
 - THE FLUX VALVE CALPROM IS A ONE PC UNIT WHERE THE MATING CONNECTOR P5 IS AN INTEGRAL PART OF THE CALPROM ITSELF. THEREFORE, NO WIRING IS REQUIRED AS CALPROM AFFIXES DIRECTLY ONTO THE AHRs CONNECTOR J5. REFER TO P/L NOTE 3 FOR CALPROM INSTL DETAILS.
 - FOR GND BLOCK/STUD LOCATIONS, REFER TO THE GND BLOCK/STUD INSTL DWG CALLED OUT ON THE AVIONICS INSTL KIT.
 - REFER TO NOSE EQUIP INSTL FOR LOCATION.
 - SEE DETAIL "A" FOR INSTL OF BOOT OVER CIRCUIT BREAKER. SEE P/L NOTE 4 FOR INSTL DETAILS.

DATE	5/15/2003	CESSNA AIRCRAFT COMPANY
DRAWN	GARY SCHWEITZER	AIRCRAFT DIVISION
CHECK		P.O. BOX 7704
SECT		WICHITA, KANSAS 67227
PROD		
M.F.		
OTHER		
C/A - AHRs 1 (LCR-93)		
FABRICATE PER	CSAM005	SIZE FROM NO.
PROCESS PER	325233333333	DWG NO.
WIRE TERMINATION PER	3252716	F71379 8617111
SCALE:	PARENT: 8617109	SHEET 1 OF 1

8617111 EC52743